




# 7/26E - 7/31E Portable Air Compressors



Model	7/26E		7/31E		
<b>COMPRESSOR</b>					
Free Air Delivery - m <sup>3</sup> /min (cfm)	2.5 (90)		3.0 (105)		
Rated Operating Pressure - bar (psi)	7 (100)		7 (100)		
Maximum allowable pressure - bar (psi)	8.6 (125)		8.6 (125)		
Safety valve setting - bar (psi)	10 (145)		10 (145)		
<b>ENGINE</b>					
Make	Ingersoll Rand		Ingersoll Rand		
Model	3IRH2NS		3IRH8N		
No of cylinders	3		3		
Full load speed - rpm	2800		2800		
Power - kW (hp)	21.2 (28.5)		26.0 (34.8)		
Electrical - volts	12		12		
Cooling	water		water		
Fuel tank capacity - liters	50		50		
Air outlets BSPT (British Standard Pipe Thread)	2 x 3/4"		2 x 3/4"		
<b>SOUND LEVEL DATA</b>					
Fully compliant to outdoor noise directive 2000/14/EC (2006)	LWa	98	98		
<b>TYRES</b>					
Tyre size	155R13		155R13		
Number of wheels	2		2		
	<b>7/26E</b>				
	<b>7/31E</b>				
	Without brakes		With brakes		
<b>TOWBAR</b>	Fixed	Adjustable	Fixed	Adjustable	
Length - mm (A)	2707	2885/ 3065	2923	3229/ 3357	
Width - mm (B)	1390	1390	1390	1390	
Height - mm (C)	1235	1235	1235	1235	
Weight (net)* - kg	540	560	575	590	
	Without brakes		With brakes		
<b>TOWBAR</b>	Fixed	Adjustable	Fixed	Adjustable	
Length - mm (A)	2707	2885/ 3065	2923	3229/ 3357	
Width - mm (B)	1390	1390	1390	1390	
Height - mm (C)	1235	1235	1235	1235	
Weight (net)* - kg	560	580	595	610	
<b>Box skid mounted</b>		<b>7/26E</b>		<b>7/31E</b>	
Length - mm (D)	1610		1610		
Width - mm (E)	940		940		
Height - mm (I)	1070		1070		
Weight (net)* - kg	495		515		
<b>Box</b>		<b>7/26E</b>		<b>7/31E</b>	
Length - mm (D)	1610		1610		
Width - mm (E)	940		940		
Height - mm (H)	870		870		
Weight (net)* - kg	465		485		

\*full fuel add 40kg  
 generator option add 53kg  
 full option add 60kg

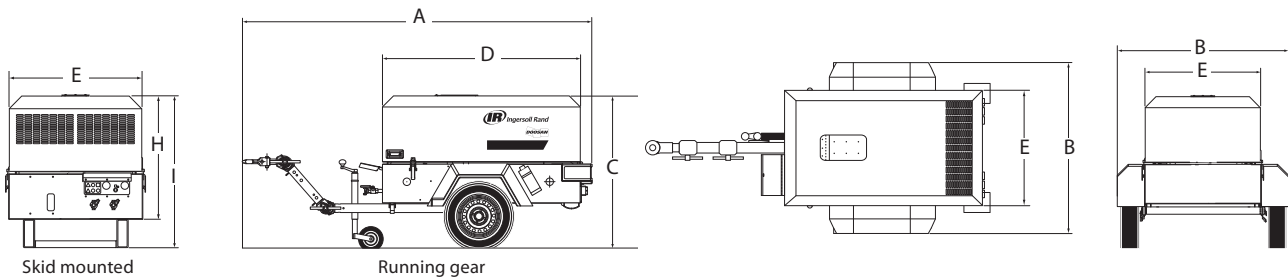

[www.doosanportablepower.com](http://www.doosanportablepower.com)



Product improvement is a continuous goal at Doosan Infracore Portable Power. Specifications and design are subject to change without notice or obligation. All dimensions in mm.

